




Models	DV 1	DA 1	V DC	Hz	A DC (75mV)
Features	True RMS measurements 1 ϕ -2W	True RMS measurements 1 ϕ -2W	DC VOLTS 1 ϕ -2W	True RMS measurements 1 ϕ -2W	DC Ammeter 1 ϕ -2W
Display	Red 7 Segment LED				
Digits	1 row of 4 Digits				
Input Type	1 ϕ -2W				
Input Range	19V-600V AC (L-L)	50mA-5A AC(20A max*)	1V -500V DC	40 to 99 Hz	Selectable current
CT Primary		1A /5A to 5000A AC			5000A -75mV DC
Aux.Supply	230V AC+/-20% (50/60 Hz), 80V- 270V AC/DC*				
Measuring Parameter	Voltage (L-N or L-L)	Current I1	DC Voltage	Frequency	Milli Volts 4-20mA DC(Selectable)*
Accuracy	Class 1				



Models	DW 34	DPF 34	DVar 34/DVA 34
Input Range	19V-600V AC (L-L), 50 mA - 5A(6A Max)		
Measuring Parameter	Active power	Power Factor	Reactive/Apparent Power
Input Type	3 ϕ -4W, 1 ϕ -2W		
Input Range	19V-600V AC (L-L)		
CT Primary	1A /5A to 5000A AC		
Aux.Supply	230V AC+/-20% (50/60 Hz), 80V- 270V AC/DC		
Accuracy	Class 1		

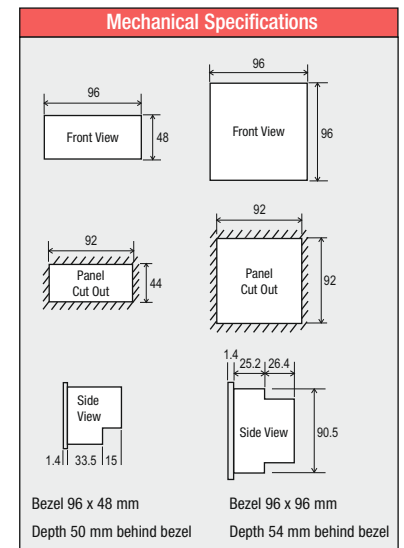

Terminal Connections

