




| Models | DV 1 | DA 1 | V DC | Hz | A DC (75mV) |
|---------------------|--|---------------------------------------|--------------------------|---------------------------------------|---------------------------------------|
| Features | True RMS measurements 1 ϕ -2W | True RMS measurements 1 ϕ -2W | DC VOLTS 1 ϕ -2W | True RMS measurements 1 ϕ -2W | DC Ammeter 1 ϕ -2W |
| Display | Red 7 Segment LED | | | | |
| Digits | 1 row of 4 Digits | | | | |
| Input Type | 1 ϕ -2W | | | | |
| Input Range | 19V-600V AC (L-L) | 50mA-5A AC(20A max*) | 1V -500V DC | 40 to 99 Hz | Selectable current |
| CT Primary | | 1A /5A to 5000A AC | | | 5000A -75mV DC |
| Aux.Supply | 230V AC+/-20% (50/60 Hz), 80V- 270V AC/DC* | | | | |
| Measuring Parameter | Voltage (L-N or L-L) | Current I1 | DC Voltage | Frequency | Milli Volts 4-20mA DC(Selectable)* |
| Accuracy | Class 1 | | | | |



| Models | DW 34 | DPF 34 | DVAr 34/DVA 34 |
|---------------------|---|--------------|-------------------------|
| Input Range | 19V-600V AC (L-L), 50 mA - 5A(6A Max) | | |
| Measuring Parameter | Active power | Power Factor | Reactive/Apparent Power |
| Input Type | 3 ϕ -4W, 1 ϕ -2W | | |
| Input Range | 19V-600V AC (L-L) | | |
| CT Primary | 1A /5A to 5000A AC | | |
| Aux.Supply | 230V AC+/-20% (50/60 Hz), 80V- 270V AC/DC | | |
| Accuracy | Class 1 | | |

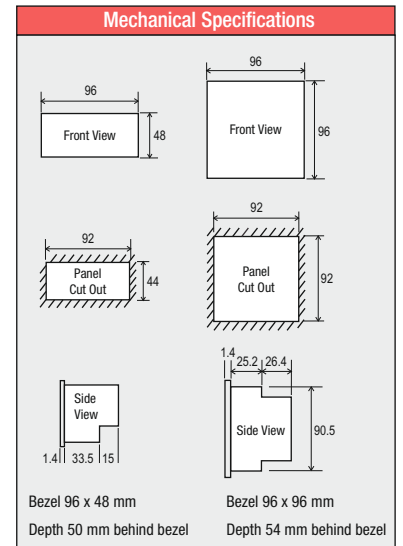

Terminal Connections

