


## ET 4



### Approvals

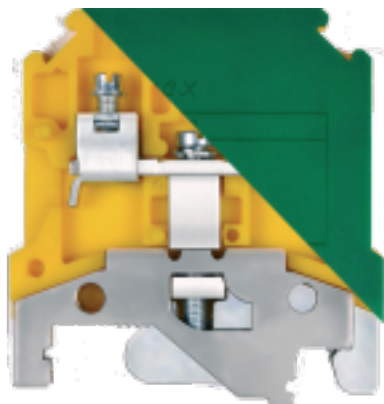

### General Data

Type	ET 4
Wire Termination Technology	Screw Clamp
Ratings	4 sq mm/0.5 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M3

### Dimensions & Weight

Height (mm)	45.50
Height (inches)	1.78
Width (mm)	43
Width (inches)	1.69
Thickness (mm)	6
Weight For Standard Packing Qty (Kg)	1.20

## Material Data

Housing	PA 6,6
Standard Colour	Green-Yellow
Other Color Variants	No more colors available

## Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	4
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	4

## Ratings - IEC

Standard	IEC 60947-7-2
Rated Voltage (V)	-
Rated Current (A)	-
Rated Cross Section (sq mm)	0.5
Short Time Withstand Current (kA)	0.48
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

## Ratings-ATEX

Certificate No	-
Rated Current (A)	-
Rated Cross Section (sq mm)	4

## Ratings-CSA

Rated Voltage (V)	-
Rated Current (A)	-
Wire Cross Section - min (AWG)	24




**SCUN (Universal Rail Mounted)**

**Height : 35.50 mm**


**Width : 50.60 mm**

**Thickness : 9.50 mm**



**Marking Label**

**LABEL KN5.5**

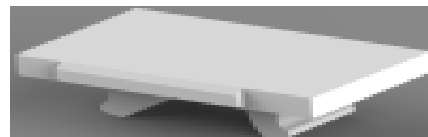


**Group Marking Carrier**

**DCKNMLH**

**Height : 45.50 mm**

**Width : 43.50 mm**

**Thickness : 6 mm**




**SCKNMLH**

**Height : 45.50 mm**

**Width : 48 mm**

**Thickness : 8 mm**




**SCUNMLH**

**Height : 53.50 mm**

**Width : 50.60 mm**

**Thickness : 8 mm**



**Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)**



