



# KUDD 4



## Approvals

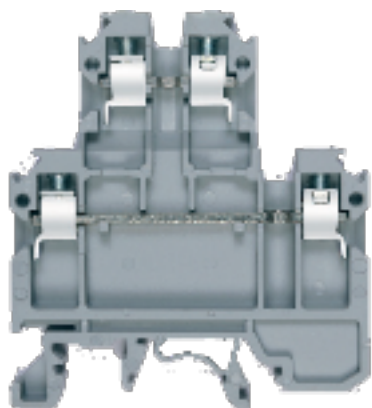

## General Data

Type	KUDD 4
Wire Termination Technology	Screw Clamp
Ratings	500 V/24 A/2.5 sq mm/0.4 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	M3

## Dimensions & Weight

Height (mm)	59.50
Height (inches)	2.34
Width (mm)	54
Width (inches)	2.13
Thickness (mm)	6
Weight For Standard Packing Qty (Kg)	1.52

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	2.5
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	4

## Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	500
Rated Current (A)	24
Rated Cross Section (sq mm)	2.5
Short Time Withstand Current (kA)	0.30
Rated Impulse Withstand Voltage(kV)	6
Pollution Degree	III

## Ratings-ATEX

Certificate No	275
Rated Current (A)	21
Rated Cross Section (sq mm)	2.5

## Ratings-CSA

Rated Voltage (V)	600
Rated Current (A)	20
Wire Cross Section - min (AWG)	20

Wire Cross Section - max (AWG)

12

## Ratings-uL

Rated Voltage (V)

600

Rated Current (A)

20

Conductor Size - min (AWG)

20

Conductor Size - max (AWG)

12

## Accessories

### End Plate

KPDD

Height : 50 mm

Width : 54 mm

Thickness : 2.50 mm



### Protection Cover

PCK3

Height : 28 mm

Width : 58.35 mm

Thickness : 1 mm




### End Clamp

SCUDD

Height : 50 mm

Width : 55.50 mm

Thickness : 10 mm



**SCUSL**

**Height : 41 mm**

**Width : 47.50 mm**

**Thickness : 8 mm**



**Cross Connection Link Assembly**

**CCLADD**


**( ( 2W, 3W, 4W, 5W, 10W ) )**



**Comb-type Shorting Link**


**SLC4N**

**( 2 Way, 3 Way, 4 Way, 5 Way, 10 Way )**



**Marking Label**

**LABEL KN5.5**

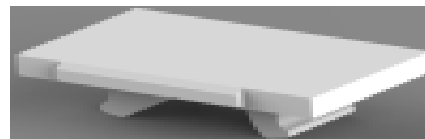

**Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)**

**CHK**

**Height : 7.5 mm**  
**Width : 35 mm**  
**Thickness : 1 mm**



**CHKD**

**Height : 15 mm**  
**Width : 35 mm**  
**Thickness : 1.50 mm**



**CHKDS (Perforated)**

**Height : 15 mm**  
**Width : 35 mm**  
**Thickness : 1.50 mm**



**CHKS (Perforated)**

**Height : 7.5 mm**  
**Width : 35 mm**  
**Thickness : 1 mm**



**CHS**

**Height : 15 mm**  
**Width : 32 mm**  
**Thickness : 1.50 mm**



**Support for Protection Cover**

