





Connection Diagram

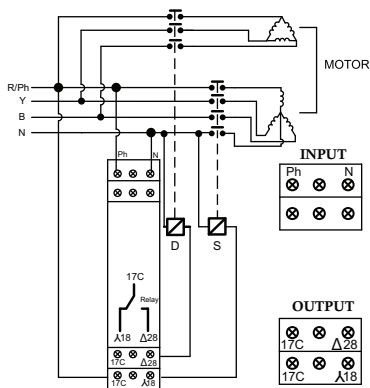

Functional Diagram

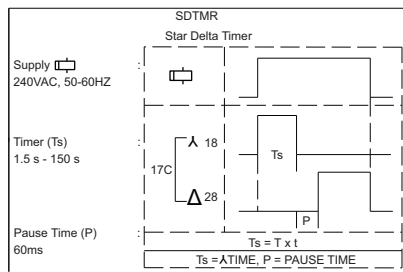

Application:

'elmex' make SDTMR is used with Star Delta starters and provides desired monitoring and control in Motor operations.

Salient Features:

- 17.5 mm DIN Rail Mount.
- SPDT Relay Output.
- Green LED for Star mode Indication.
- Red LED for Delta mode Indication.

Technical Specification

Supply Voltage

Supply Voltage Ph-N 220 / 230 / 240 V

Frequency Range 50 - 60 Hz

Power Consumption 15 VA Maximum

Delays

Delta mode on time delay (Ts) 1.5 sec to 150 sec

Pause Timing (P) 60 ms

Output Specifications

Output Contact SPDT

Contact Detail 1A @ 125VAC / 2A @ 30VDC

LED Indications For Functional Specifications

Star mode indication 3 mm Green LED

Delta mode indication 3 mm Red LED

Housing

Material Polyamide 6,6

Colour Grey

Dimension 90 x 56.4 x 17.5

Mounting TS 35 DIN Rail