


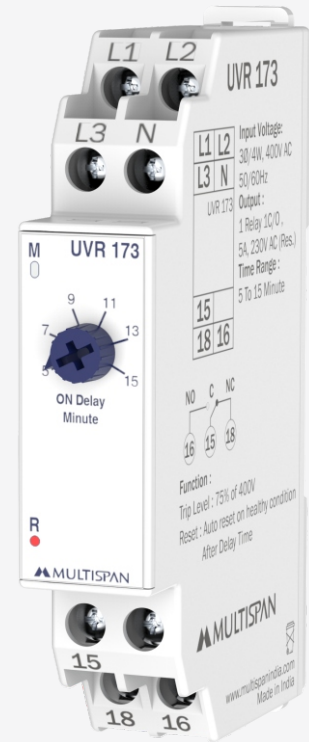

UNDER VOLTAGE RELAY

UVR-173

APPLICATIONS

Air conditioning system


Lighting system

Transformer protection

Data centers


Electrical panels

Mechanical Dimensions

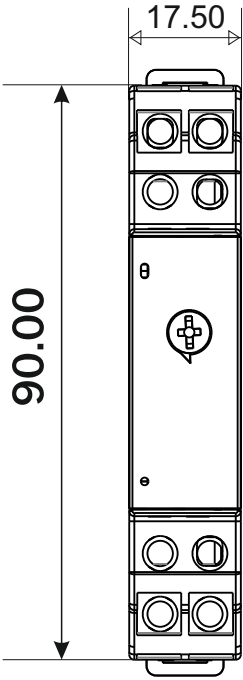


FRONT VIEW

All dimensions are in mm

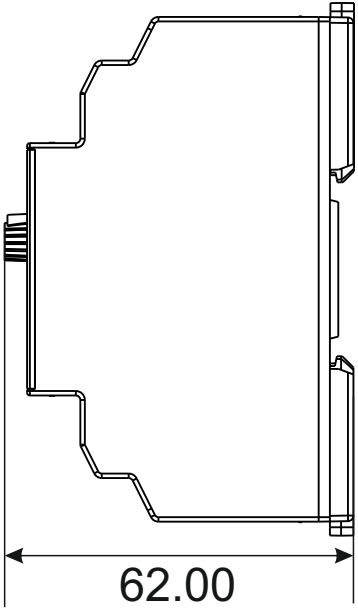

RIGHT SIDE VIEW

Connection Diagram

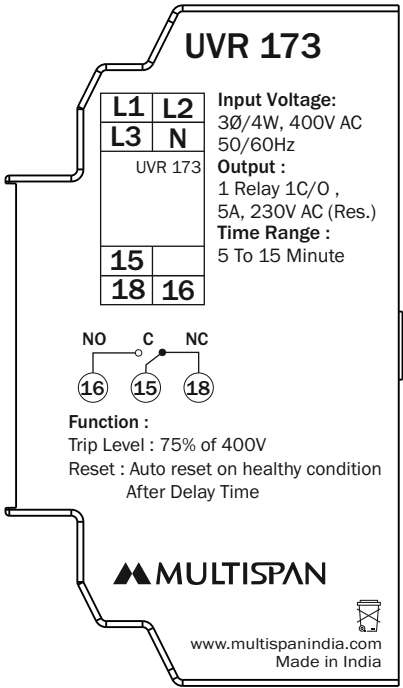

TECHNICAL DATA

Dimension (HxWxD) mm	90 x 17.5 x 62 mm
Mounting	DIN Rail Mounting
Output	1Relay 1 C/O 5A 230V AC (Res.)
Supply Voltage	3Ø4W, 400V AC, 50/60 Hz

FEATURES

- Auto Reset
- Power On Delay (5 - 15 Min Selectable)

Protection Available

- Under Voltage

LED

LED Indication

Main LED
Relay LED

Output

Relay

Relay with 1 C/O, 5A
230 V AC On Resistive Load

SUPPLY VOLTAGE

Input Voltage	3Ø4W, 400V AC, 50/60Hz
Burden	7VA @ 230V AC Max

Environmental

Operating Temperature	0 to 55 °C
Storage Temperature	0 to 70 °C
Humidity	95% RH Non-condensing


Trip Parameter

Trip Level	75% Of 400V
------------	-------------

Dimensions

Mounting	Din Rail Mounting
Bezel (HXW)	90 x 17.5 mm
Depth of Installation	62 mm

Control Function

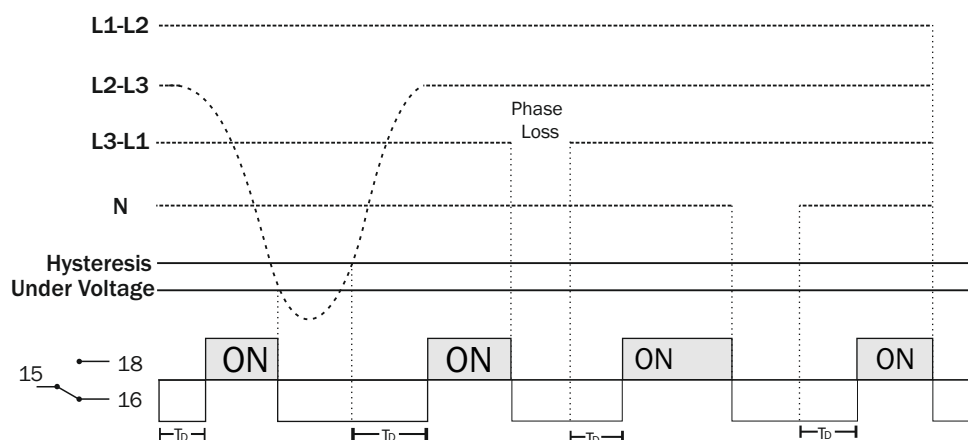

Hysteresis = 8 V

T_D = Time Delay (5 - 15 Min)