



# Data Sheet

Three-Phase Direct Connected Energy Meter

RISH ED4311 Mod / ED4301 4TS



Measure



Control



Record



Analyze

# Data Sheet

---

## RISH ED43XX

### Overview :

RISH ED43XX is a modern Three Phase Direct Connected Energy Meter designed for intended use in residential, commercial and light industrial Electrical Energy Metering. The meter is engineered using advanced microcontroller technology and is suitable for electrical parameter measurement and monitoring in 3 Phase 4 Wire, 3 Phase 3 Wire and 1 Phase 2 Wire Networks. It supports maximum 100 A current measurement on direct connection. It supports Tariff Counters selectable via Digital Input. It displays parameters on bright intuitive LCD and also has Pulse Outputs and Impulse LED for energy monitoring. It has industry standard MODBUS RTU for remote monitoring. Meter housing is standard Din Rail Mount that allows ease of installation.

### Product Features :

#### Direct Connection Meter :

RISH ED43XX can safely measure 100A maximum current on direct connection, eliminating the use of expensive external CT for high current networks. Meter is also self-powered thus offer simplified connections.

#### Measured Electrical Parameters :

RISH ED43XX is primarily for bidirectional Active, Reactive and Apparent Energy measurement but it also accurately measures important electrical parameters like Voltage, Current, Frequency, Active, Reactive and Apparent Power, and Power Factor in Three Phase and Single Phase Networks. The measured parameters can be viewed on display and MODBUS for remote viewing.

#### Demand :

The Demand parameter for Active Power (Import/Export), Reactive Power (Import/Export), Apparent Power and Current are calculated as per configurable Demand Integration time.

#### Pulse Outputs :

The RISH ED43XX has two opto-isolated SO Outputs that can be configured for any one of the Active (Total/Import/Export), Reactive (Total/Import/Export) Energy parameter. The pulse width and rate of pulse output is onsite programmable.

#### Impulse LED :

The meter has Impulse LED which flash at rate of 1000 IMP/kWh indicating the Active Energy consumption.

#### Digital Inputs:

The meter has two Digital Input (DI) dedicated for selection of four tariff T1, T2, T3 and T4 selection. The opto-isolated DI is rated for a wide range of AC/DC voltage for operation.

#### Front Keys :

Three keys are provided for easy navigation and accessibility of different parameters and onsite programming of the meter.

#### Remote Communication (ED4311 Mod) :

RISH ED4311 Mod has communication based on MODBUS protocol for remote data acquisition of measurement data and configuration. MODBUS parameters Baud rate, Device address and parity- stop bits are programmable. It provides more than 100 measurement parameters and 20 additional user assignable registers for programmable mapping sequence.

#### LCD & Backlit :

The LCD has bold seven segment digits with bright white backlit for display of measurement parameters. Special symbols, units and bar graph are provided for effective display and easy onsite configuration.

Indications for communication status, active tariff, digital inputs and pulse outputs status are continuously available on screen. Measurement screen can be set as automatic scrolling or manual scrolling.

#### Multi Tariff and Partial Energy Counters:

The meter has Tariff Counters for energy accumulation which are selectable via Digital Input. Energy for Tariff and Partial counters are Total/Import/Export Active Energy, Total/Import/Export Reactive Energy, Total Apparent Energy.

#### Compliance to Standards :

Accuracy Standard :	EN50470-1, 3
	IEC62053-21, 23
IP for water & dust:	IEC 60529
Plastic Flammability Standard:	UL 94

Datasheet subject to change without notice.



Measure



Control



Record





Analyze

# Data Sheet

## RISH ED43XX

### Dimensions Details:

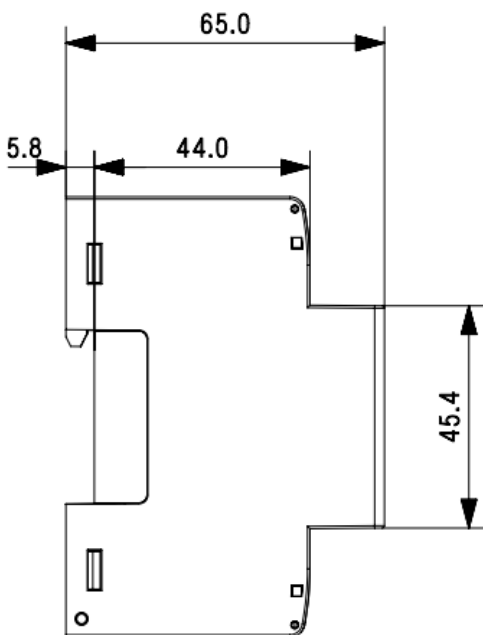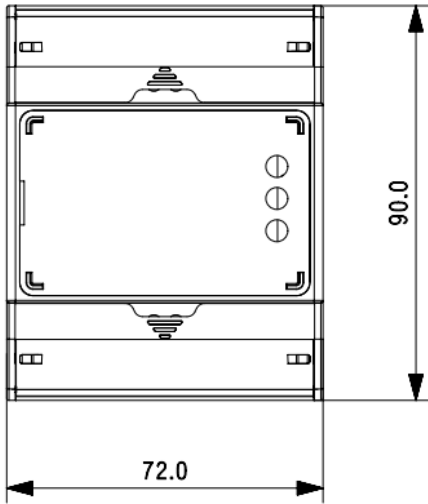

### Technical Specifications:

#### Measurement Parameters:

Reference Voltage ( $U_n$ )	230 VLN (400 VLL)
Operating Voltage Range	100 - 289 VLN (173 - 500 VLL)
Power consumption in Voltage Circuit	< 2 W (10 VA) per phase
Starting Current ( $I_{st} = 0.04 \cdot I_{tr}$ )	20 mA
Minimum Current ( $I_{min} = 0.5 \cdot I_{tr}$ )	250 mA
Transitional Current ( $I_{tr}$ )	0.5 A
Reference Current ( $I_{ref} = 10 \cdot I_{tr}$ )	5 A
Maximum Current ( $I_{max} > 50 \cdot I_{tr}$ )	100 A
Operating Current Range	0.25-5 A (100 A)
Short time Over-current	$30 \cdot I_{max}$ for half-cycle at 50 Hz
Power consumption in Current Circuit	<1VA per phase
Frequency	50/60 Hz

#### Auxiliary Supply :

Type	Self Powered
------	--------------

#### Reference Conditions for Accuracy :

Reference Temperature	$23^\circ\text{C} \pm 2^\circ\text{C}$
Input Voltage	$U_n \pm 1\%$
Input Waveform	Sinusoidal (Distortion Factor <2%)
Input Frequency	$50 \text{ Hz} \pm 0.3\%$

#### Accuracy :

Active Energy (Import/Export)	Class B as per EN50470-3 Class 1 as per IEC 62053-21
Reactive Energy (Import/Export)	Class 2 as per IEC62053-23
Apparent Energy	$\pm 1.0 \%$
Voltage	$\pm 0.5\%$ of range max
Current	$\pm 0.5\%$ of Nominal value
Frequency	$\pm 0.2\%$ of Mid frequency
Active Power	$\pm 1\%$ of range max
Reactive Power	$\pm 1\%$ of range max
Apparent Power	$\pm 1\%$ of range max
Power Factor	$\pm 1\%$ of unity
VTHD and ITHD	$\pm 4\%$ (THD $\geq 15\%$ )

#### Pulse Outputs :

SO1 and SO2	Passive Opto-isolated
Contact Ranges	5-27V DC, 27 mA DC (max)
Pulse Duration	60, 100 and 200 millisecond
Pulse Rate	0.01, 0.1, 1, 10, 100, 500 and 1000 pulse per kWh and kVARh
Parameters	Total/Import/Export kWh and kVARh

#### Communication Interface :

Protocol	RS485 MODBUS
Baudrate	4.8 / 9.6 / 19.2 / 38.4 / 57.6 kbps
Data Width	8
Parity- Stop Bits	None -1 / None -2/ Even -1 / Odd -1
Response Time	200 millisecond

Datasheet subject to change without notice.



Measure



Control



Record






Analyze

# Data Sheet

## RISH ED43XX

### Connector Details:

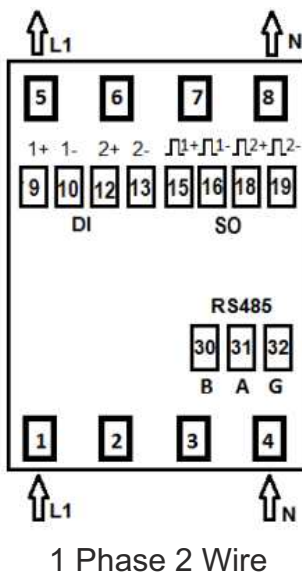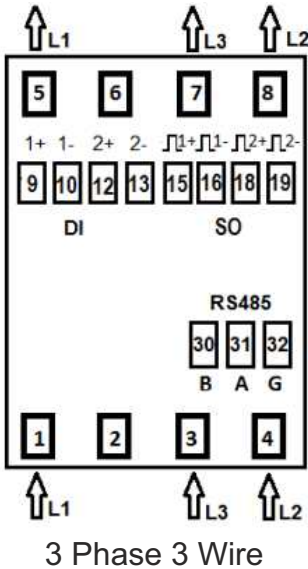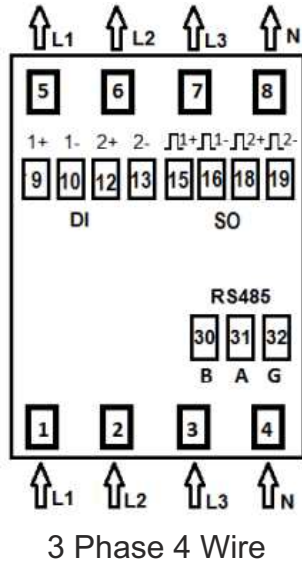

### Impulse LED :

Impulse Rate 1000 pulse per kWh

### Display Ranges :

Active Energy 0-999999.99 kWh  
 Reactive Energy 0-999999.99 kVARh  
 Apparent Energy 0-999999.99 kVAh  
 Active Power 0-99999 W  
 Reactive Power 0-99999 VAR  
 Apparent Power 0-99999 VA

### Digital Input :

0 V Low  
 20... 300 VAC / 10... 60 VDC High

### Installation :

Installation Indoor  
 Enclosure IP51 (Front)  
 Housing (4 Module DIN 43880)  
 Dimensions 72 mm X 90 mm X 65 mm  
 Weight 350 gm  
 Mounting Snap-on 35 mm DIN Rail

### Safety :

Safety Standard According to EN50470  
 Installation Category III  
 Protective Class II  
 Pollution Degree 2  
 AC Voltage Test 4kV for 1 Minute  
 Impulse Voltage Withstand 6 kV (1.2 microsecond waveform)  
 Housing flame Resistance Flammability Class V-0 acc to UL-94, Self Extinguishing, Non-Dripping, Free of Halogen

### Environmental Conditions :

Mechanical Environment M1  
 Electromagnetic Environment E2  
 Operating Temperature -25°C to +55°C (3K6)  
 Storage/Transport Temperature -40°C to +70°C  
 Relative Humidity 0... 90% (Non Condensing)  
 Altitude < 2000 m

### Wiring Guidelines:

Current Input Wire Size 1 to 25 mm<sup>2</sup>  
 Current/Voltage Tightening Torque 3 Nm  
 RS485 / SO / DI Wire Size 0.1 to 2.5 mm<sup>2</sup>  
 (Solid/Stranded with pin type lug)  
 RS485 / SO / DI Tightening Torque 0.3 to 0.4 Nm

Datasheet subject to change without notice.



Measure



Control



Record



Analyze

### Measured Parameters System wise:

✓ : Available

\* : Not Available

Sr No	Parameters	3 Phase 4Wire	3Phase 3Wire	1Phase 2Wire
1.	Import Active Energy	✓	✓	✓
2.	Export Active Energy	✓	✓	✓
3.	Total Active Energy	✓	✓	✓
4.	Import Reactive Energy	✓	✓	✓
5.	Export Reactive Energy	✓	✓	✓
6.	Total Reactive Energy	✓	✓	✓
7.	Total Apparent Energy	✓	✓	✓
8.	T1 Import Active Energy	✓	✓	✓
9.	T1 Export Active Energy	✓	✓	✓
10.	T1 Total Active Energy	✓	✓	✓
11.	T1 Import Reactive Energy	✓	✓	✓
12.	T1 Export Reactive Energy	✓	✓	✓
13.	T1 Total Reactive Energy	✓	✓	✓
14.	T1 Total Apparent Energy	✓	✓	✓
15.	T1 Partial Import Active Energy	✓	✓	✓
16.	T1 Partial Export Active Energy	✓	✓	✓
17.	T1 Partial Import Reactive Energy	✓	✓	✓
18.	T1 Partial Export Reactive Energy	✓	✓	✓
19.	T2 Import Active Energy	✓	✓	✓
20.	T2 Export Active Energy	✓	✓	✓
21.	T2 Total Active Energy	✓	✓	✓
22.	T2 Import Reactive Energy	✓	✓	✓
23.	T2 Export Reactive Energy	✓	✓	✓
24.	T2 Total Reactive Energy	✓	✓	✓
25.	T2 Total Apparent Energy	✓	✓	✓
26.	T2 Partial Import Active Energy	✓	✓	✓
27.	T2 Partial Export Active Energy	✓	✓	✓
28.	T2 Partial Import Reactive Energy	✓	✓	✓
29.	T2 Partial Export Reactive Energy	✓	✓	✓
30.	T3 Import Active Energy	✓	✓	✓
31.	T3 Export Active Energy	✓	✓	✓
32.	T3 Total Active Energy	✓	✓	✓
33.	T3 Import Reactive Energy	✓	✓	✓
34.	T3 Export Reactive Energy	✓	✓	✓
35.	T3 Total Reactive Energy	✓	✓	✓
36.	T3 Total Apparent Energy	✓	✓	✓
37.	T3 Partial Import Active Energy	✓	✓	✓
38.	T3 Partial Export Active Energy	✓	✓	✓
39.	T3 Partial Import Reactive Energy	✓	✓	✓
40.	T3 Partial Export Reactive Energy	✓	✓	✓
41.	T4 Import Active Energy	✓	✓	✓
42.	T4 Export Active Energy	✓	✓	✓
43.	T4 Total Active Energy	✓	✓	✓
44.	T4 Import Reactive Energy	✓	✓	✓
45.	T4 Export Reactive Energy	✓	✓	✓
46.	T4 Total Reactive Energy	✓	✓	✓
47.	T4 Total Apparent Energy	✓	✓	✓
48.	T4 Partial Import Active Energy	✓	✓	✓
49.	T4 Partial Export Active Energy	✓	✓	✓
50.	T4 Partial Import Reactive Energy	✓	✓	✓
51.	T4 Partial Export Reactive Energy	✓	✓	✓

Datasheet subject to change without notice.



Measure



Control



Record



Analyze

### Measured Parameters System wise contd.:

52.	L1, L2, L3 Import Active Energy	✓	✗	✗
53.	L1, L2, L3 Export Active Energy	✓	✗	✗
54.	L1, L2, L3 Total Active Energy	✓	✗	✗
55.	L1, L2, L3 Import Reactive Energy	✓	✗	✗
56.	L1, L2, L3 Export Reactive Energy	✓	✗	✗
57.	L1, L2, L3 Total Reactive Energy	✓	✗	✗
58.	L1, L2, L3 Total Apparent Energy	✓	✗	✗
59.	Partial Import Active Energy	✓	✓	✓
60.	Partial Export Active Energy	✓	✓	✓
61.	Partial Total Active Energy	✓	✓	✓
62.	Partial Import Reactive Energy	✓	✓	✓
63.	Partial Export Reactive Energy	✓	✓	✓
64.	Partial Total Reactive Energy	✓	✓	✓
65.	Partial Total Apparent Energy	✓	✓	✓
66.	Current Max Demand	✓	✓	✓
67.	kVA Max Demand	✓	✓	✓
68.	kW Max Demand	✓	✓	✓
69.	kVar Max Demand	✓	✓	✓
70.	Import kW Max Demand	✓	✓	✓
71.	Export kW Max Demand	✓	✓	✓
72.	Import kVar Max Demand	✓	✓	✓
73.	Export kVar Max Demand	✓	✓	✓
74.	L1, L2, L3 Current Max Demand	✓	✓	✗
75.	System Voltage	✓	✓	✓
76.	L1, L2, L3 Voltage	✓	✗	✗
77.	L12, L23, L31 Voltage	✓	✓	✗
78.	System Current	✓	✓	✓
79.	L1, L2, L3 Current	✓	✓	✗
80.	Frequency	✓	✓	✓
81.	System Active Power	✓	✓	✓
82.	L1, L2, L3 Active Power	✓	✗	✗
83.	System Reactive Power	✓	✓	✓
84.	L1, L2, L3 Reactive Power	✓	✗	✗
85.	System Apparent Power	✓	✓	✓
86.	L1, L2, L3 Apparent Power	✓	✗	✗
87.	System Power Factor	✓	✓	✓
88.	L1, L2, L3 Power Factor	✓	✗	✗
89.	System Phase Angle	✓	✓	✓
90.	L1, L2, L3 Phase Angle	✓	✗	✗
91.	System Voltage THD	✓	✓	✓
92.	L1, L2, L3 Voltage THD	✓	✗	✗
93.	System Current THD	✓	✓	✓
94.	L1, L2, L3 Current THD	✓	✗	✗

Datasheet subject to change without notice.



Measure



Control



Record



Analyze

### Order Code:

#### Ordering Information:

Product Code : ED43 - M - 0 - 01 - 02 - B - 0 - B - 0000

**3Ph Direct Connected Energy Meter**

**Current Range:**

02 - 0.25-5 A (100 A)

**Communication, Pulse Output and Digital Input:**

A : 2 SO Output and 2 Digital Input (ED4301 4TS)

B : Modbus with 2 SO Output and 2 Digital Input (ED4311 Mod)

### Order Code Example:

**ED43-M00102B0B0000**

ED4311-Mod 3 Phase Direct Connected Energy Meter with Input voltage 100-289VLN, 0.25-5 A (100 A), Modbus with 2 SO Output and 2 Digital Input.

Datasheet subject to change without notice.



Measure



Control



Record



Analyze



RISHABH



Measure



Control



Record



Analyze